





YULAN ELECTRICAL CO., LIMITED



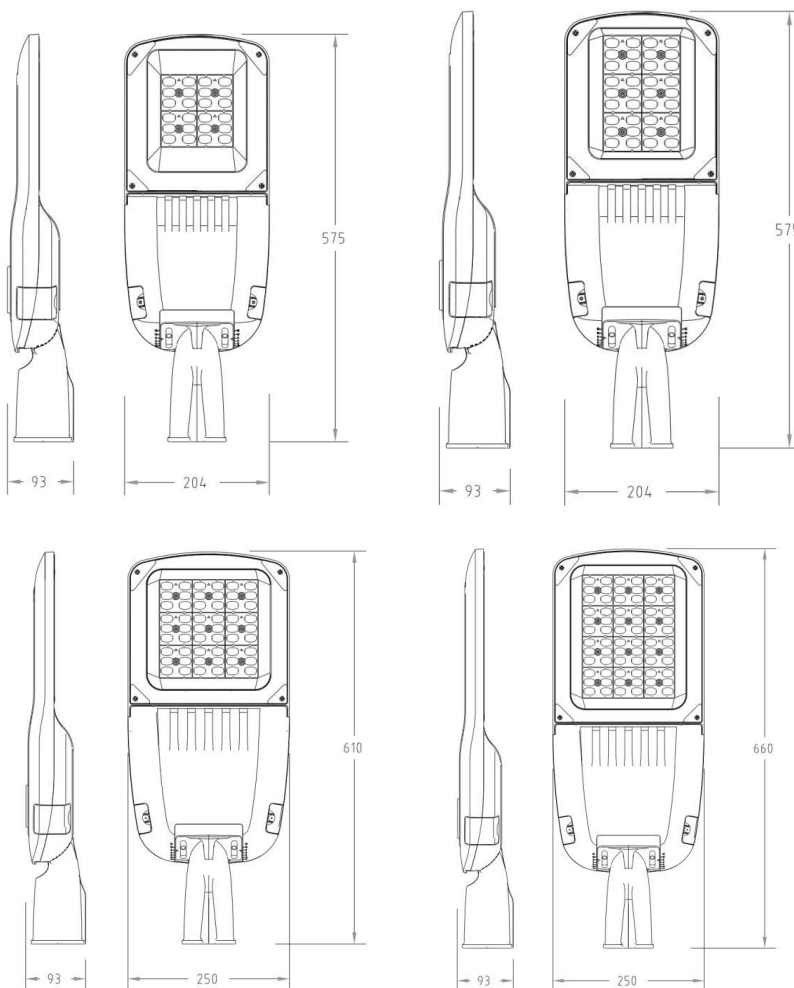

YULAN ELECTRICAL CO., LIMITED

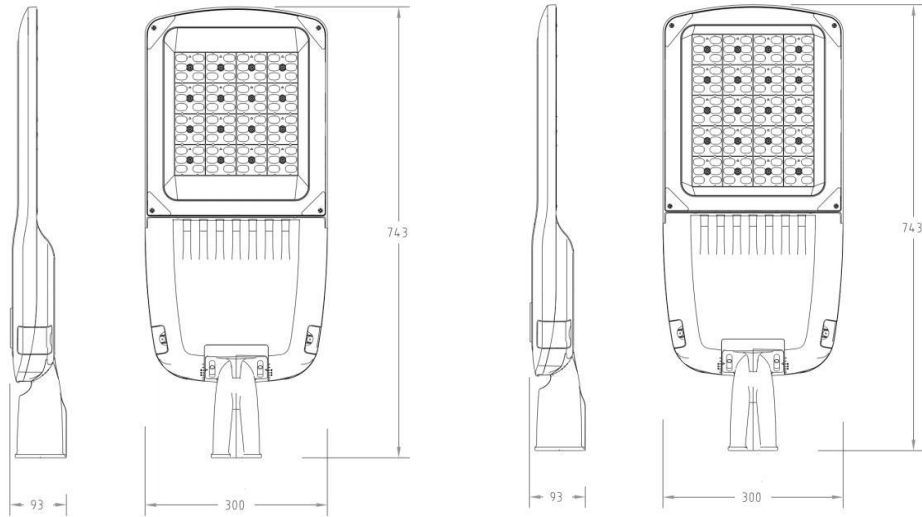



YULAN ELECTRICAL CO., LIMITED

Item	Specification
Product Model	YL- 11- 00101
Product Type	Project LED Street Light, SKD housing available
Size	S / M / L / XL
Wind Area	S:0.09 m ² ; M:0.12 m ² ; L:0.13 m ² ; XL:0.17 m ²
Input Voltage	AC100- 240V, 50/60Hz
Insulation Class	Class I / Class II
Working Temperature	-40°C ~ +50°C
Warranty	7 years (under 25°C ambient condition)
Protection Grade	IP66, IK09
SPD Surge Protection	Optional 10KV / 20KV
Certifications	ENEC, ENEC+, CB, CE, RoHS, LM79, LM80
Mounting	Horizontal / Vertical; Driver top-mounted or bottom-mounted
Smart Interface	Zhaga Book15 compatible; Zhaga Book18 & NEMA socket (top & bottom)
Dimming	On/Off, 0- 10V, Timer dimming, DALI2.0, D4i, Photocell compatible
Housing Material	Die-cast aluminum, standard ADC12; Optional EN AC- 46000 / EN AC- 44100
Housing Color	Standard: RAL7046 + RAL9003 dual grey; Optional RAL7016, RAL9005, RAL9007

Item	Specification
Anti-corrosion	C3~C5 corrosion grade; 500/1000/1500h salt spray test available
Surface	Self-clean coating, tool-free housing opening
Optical Lens	T2S / T2M / T3M
LED Brand	Lumileds
CCT	Amber, 2000K ~ 5700K

Parameter	Option 1: 2×2 Zhaga Module	Option 2: 2×3 5050 Standard	Option 3: 4×4 3030 Standard
Power Range	30W ~ 200W	40W ~ 240W	40W ~ 240W
LED Chip	Lumileds 5050	Lumileds 5050	Lumileds 3030
Luminous Efficacy (4000K)	>150 lm/W	>160 lm/W	>140 lm/W
Driver Brand	Philips / Inventronics / Moso	Philips / Inventronics / Sosen	Philips / Inventronics / Sosen